


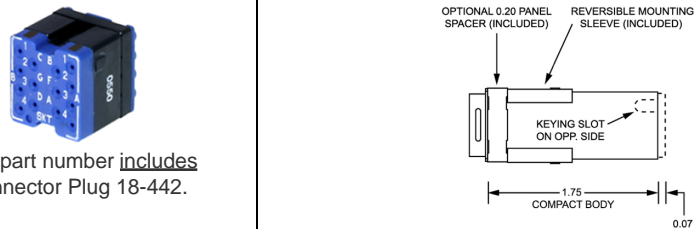
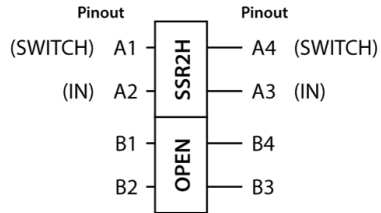


Please check for accuracy to ensure that the proper part is specified for your application.

3201 Sandy Lane  
Fort Worth, TX 76112

817-451-1141 (Phone)  
888-848-4786 (Toll Free)  
817-654-3405 (Fax)  
www.appliedavionics.com

Part Number	Not Energized	Energized	Configuration	Cap Circuit	Switch Circuit					
<b>LED-GM-17-HA1-E1WUL</b> (1SY1 ADS-B, FAIL) LB(SSR2H;0)			<b>G</b> - Compact Body w/18-442 Conn. Plug Included <b>M</b> - With LOGIC Components <b>1</b> - Unsealed <b>7</b> - Indicator, Single Circuit, Common Ground <b>H</b> - Full Face Legend <b>A</b> - 28V DC Common Anode <b>1</b> - Pin C = Illum. Test (T)		See Below					
						Legend Detail By Segment		Connector Plug	Body Dimensions	
						<b>Position</b>	<b>Color</b>	<b>Display Type</b>	<b>Char Size</b>	
						Full Face	Yellow	S (Deadface)	0.125	
LOGIC Body Component Configuration & Pole Position				Switch Circuit						
<b>LB(SSR2H;0)</b> <b>Pole A: SSR2H - Solid State Relay, 28VDC, NC</b> <b>Pole B: 0 - Open</b>										

Configuration: 0010123159